

PS Series

High Efficiency Pleated Filter Cartridges



Residential / Commercial / Industrial
Filtration Applications

Features

- Special non-cellulose media provides excellent resistance to bacterial growth and chemical attack
- Long service life and reduced maintenance costs
- Synthetic polyester pleated fabric around a durable polypropylene core
- Filters available in standard 2-3/4" and 4-1/2" cartridge diameters

Product Specifications

Nominal Micron Ratings & Efficiency

0.35, 1A, 1, 5, 10, 20, 50, 100 micron available
Rated 85% efficient

Filter Lengths

9-3/4", 19-1/2", 20", 29-1/4", 30", and 40"

Outside Diameters

2-3/4" and 4-1/2" OD

Inside Diameter

1-1/16" ID

Surface Area

2-3/4" dia. has 5 sq ft of media per 9-3/4"
4-1/2" dia. has 12 sq ft of media per 9-3/4"

Operating Temperature

40°F – 140°F (4.4°C – 60°C) temperature limit*

Initial Pressure Drop

< 1 psi typical

Materials of Construction

Filter Media: Pleated Polyester

Core: Polypropylene

Endcaps: Plastisol

Outer Mesh (10" L and 20" L only): Polypropylene

Note:

2-3/4", 4-1/2" OD by 9-7/8" L and 20" L cartridges are individually wrapped. 30" and 40" L cartridges are bulk wrapped.



* Temperature limits vary and depend on pressure and time under load.



Applications


- Drinking Water
- 2 Reverse Osmosis Prefiltration
- 3 Food and Beverage
- 4 Cosmetics
- 5 Electronics
- 6 Chemicals

Pressure Drop Information

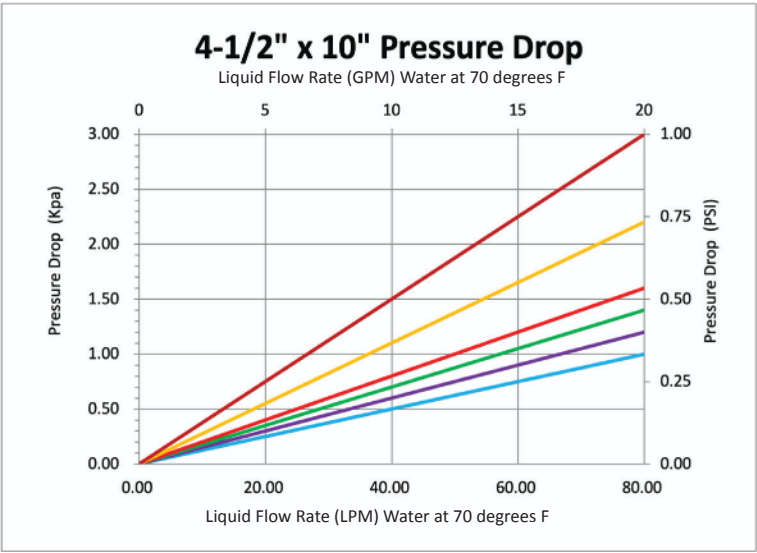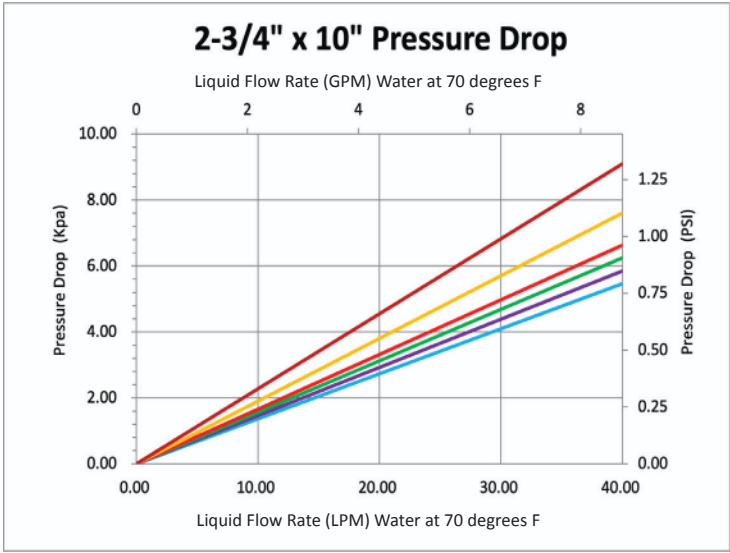

KEY: 0.35µ 1µ 5µ 10µ 20µ 50µ

Dimensions

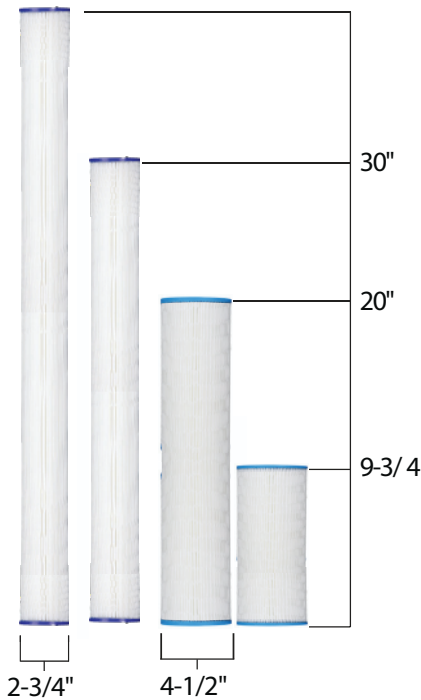

Ordering Guide (Example: PS-27300-20)

PS	–	27	–	300	–	20
TYPE		CARTRIDGE DIAMETER		CARTRIDGE LENGTH		MICRON RATING
P = Pleated Standard Polypropylene (standard)		27 = 2 3/4" 45 = 4 1/2"		097 = 9-3/4" 200 = 20" 300 = 30" 400 = 40"		s35 = 0.35 micron 01 = 1 micron 1A = 1 micron 05 = 5 micron 10 = 10 micron 20 = 20 micron 50 = 50 micron 100 = 100 micron

Case Packs

DIMENSIONS	QUANTITY
2-3/4" x 9-3/4"	48
2-3/4" x 19-1/2"	24
2-3/4" x 20"	24
2-3/4" x 29-1/4"	24
2-3/4" x 30"	24
2-3/4" x 40"	24
4-1/2" x 9-3/4"	12
4-1/2" x 20"	6

Distributed By:



2299 Ridge Rd., Greenville, SC
P: 888.859.1188 • F: 864.284.1819
NeoLogicSolutions.com • Info@NeoLogicSolutions.com

Questions?

Ask our Service Representatives at:
888.859.1188 Mon.-Fri. 8a-8p,
Sat 8:30a-4:30p EST.